

Perforated diffuser

CBAL



Description



CBAL is a low-impulse diffuser for ceiling installation. The diffuser is suitable for the supply of replacement air in laboratories, commercial kitchens, etc. The diffuser is equipped with adjustable nozzles behind the perforated face plate, allowing the dispersal pattern to be adjusted according to the conditions.

Maintenance

The face plate and nozzle tray can be removed from the diffuser to enable cleaning of the nozzles. The visible parts of the diffuser can be wiped with a damp cloth.

Dimensions

L Size mm	A mm	ØD mm	Number of connections
1200	570	315	1
1800	500	315	2

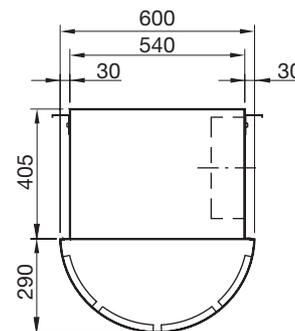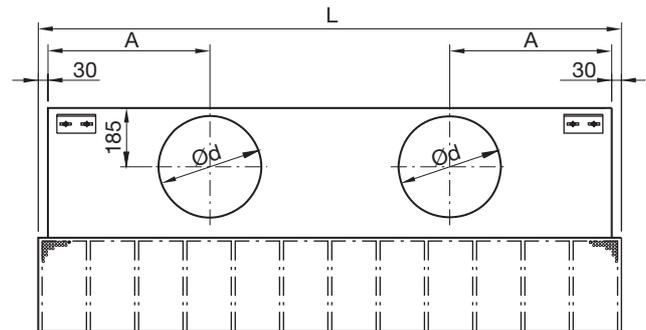

Order code

Product Type	CBAL	bbbb
Size	1200 1800	

Materials and finish

Material: Galvanised steel
 Nozzles: Black ABS plastic
 Standard finish: Powder-coated
 Standard colour: RAL 9010 Gloss 30

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

Perforated diffuser

CBAL

Technical data

Supply air

CBAL

