

Plain diffuser

LCC



Description

LCC is a flush mounted circular diffuser with a circular unperforated face plate for installation in ceiling systems and permanent ceilings. LCC can be used for both supply and extract air. LCC is suitable for horizontal supply of cooled air and has a large dynamic range.

Installing an LCC diffuser in a plenum box type MB can help to achieve a stable airflow to the diffuser as well as realise the potential for individual adjustment.

Damper type B is an unique linear cone damper which allows to use the full operational area (0-100%) and allows to balance with a high pressure drop over the box with low sound generation. Furthermore the construction of the damper gives an accurate and reliable measurement.

Damper type C and E are with rotating blade dampers for respectively supply and extract. Typically used in applications that don't require a high balancing pressure in the plenum box.

The LCC can with the plenum box MBBV be used in a Pascal system.

The LCC can be ordered with a presence sensor (-P), a temperature sensor (-T) or both (-P-T). The sensors are built into the faceplate.

- Simple and aesthetic appearance
- Large dynamic range
- Can be used for both supply and extract air
- Plenum box with several damper options

Maintenance


The faceplate can be removed to enable cleaning of internal parts or to gain access to the plenum box. the visible parts of the diffuser can be wiped with a damp cloth.

Order code

Product	LCC	aaa	(-xx)
Type			
LCC			
Connection dim.			
Ød 125-315			
Sensor type			
No sensor			
(-P) Presence sensor			
(-T) Temperature sensor			
(-P-T) Presence sensor / Temperature sensor			

Example: LCC-160-P-T


Dimensions

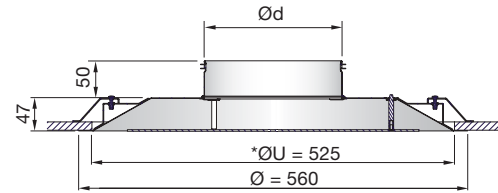


*ØU = Ceiling grid opening = 525 mm, all sizes.

LCC Ød mm	m kg
125	1.25
160	1.50
200	2.30
250	3.40
315	4.60

Ød = 125-250 => LCC has mounting holes for MB .

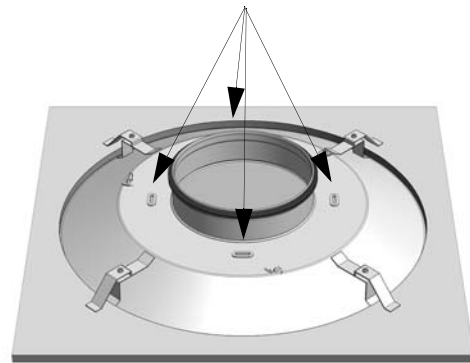

Ød = 315 => LCC has no mounting holes for MB !

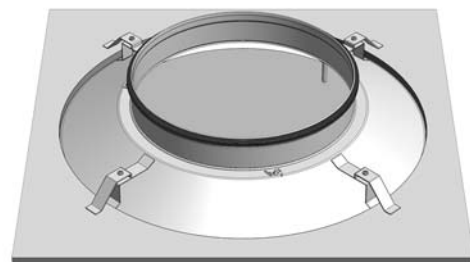

Brackets included for LCC, for details, see the Integra installation instruction.

Materials and finish

Upper part:	Galvanised steel
Face plate:	Aluminium
Face plate finish:	Powder coated
Standard colours:	RAL 9003 and RAL 9010, gloss 30

Other colours are available. Please contact Lindab's sales department for further information.

Plain diffuser

LCC/LKP/LCP


Accessories

Plenum box

MB



LKP + MB

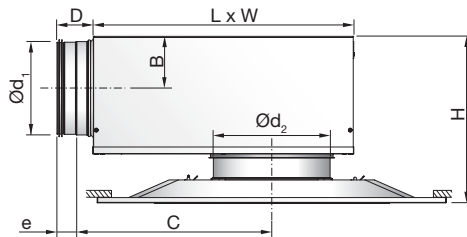

LKP + MB

Ød ₁ mm	Ød ₂ mm	B	C	D	e	H*	L	W
100	125	62	245	78	40	198 - 238	310	260
100	160	62	245	78	40	198 - 238	310	260
125	125	75	291	78	40	223 - 263	376	310
125	160	75	291	78	40	223 - 263	376	310
125	200	75	291	78	40	223 - 263	376	310
160	160	92	352	78	40	257 - 297	459	380
160	200	92	352	78	40	257 - 297	459	380
160	250	92	352	78	40	257 - 297	459	380
200	200	112	425	78	40	298 - 338	565	460
200	250	112	425	78	40	298 - 338	565	460
200	315	112	425	78	40	298 - 338	565	460
250	250	137	514	118	60	348 - 388	698	540
250	315	137	514	118	60	348 - 388	698	540
315	315	170	675	118	60	413 - 453	858	540

* Using accessory MBZ the H dimension will increase:

Ød₂ = 125 - 200 mm => H +40 mm

Ød₂ = 250 - 315 mm => H +60 mm


Order code

Product	MB	a	bbb	ccc	d
Type	MB				
Damper					
B = Linear cone damper					
C = Blade damper supply					
E = Blade damper extract					
Duct connection Ød ₁					
Ø100-315					
Diffuser dimension Ød ₂					
Ø125-315					
Function (Only for B damper)					
S = Supply air					
E = Extract					


Example 1: LCP-200-P-T-1+MBB-160-200-S

Example 2: LCP-160-1+MBC-125-160

LCC + MB

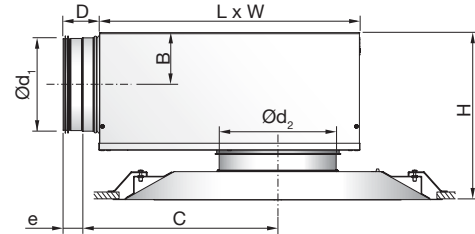

LCP + MB

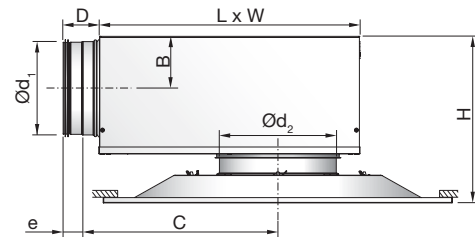

LCC/LCP + MB


Ød ₁ mm	Ød ₂ mm	B	C	D	e	H*	L	W
100	125	62	245	78	40	206 - 246	310	260
100	160	62	245	78	40	206 - 246	310	260
125	125	75	291	78	40	231 - 271	376	310
125	160	75	291	78	40	231 - 271	376	310
125	200	75	291	78	40	231 - 271	376	310
160	160	92	352	78	40	265 - 305	459	380
160	200	92	352	78	40	265 - 305	459	380
160	250	92	352	78	40	265 - 305	459	380
200	200	112	425	78	40	306 - 346	565	460
200	250	112	425	78	40	306 - 346	565	460
200	315	112	425	78	40	306 - 346	565	460
250	250	137	514	118	60	356 - 396	698	540
250	315	137	514	118	60	356 - 396	698	540
315	315	170	675	118	60	421 - 461	858	540

* Using accessory MBZ the H dimension will increase:

Ød₂ = 125 - 200 mm => H +40 mm

Ød₂ = 250 - 315 mm => H +60 mm

Damper options

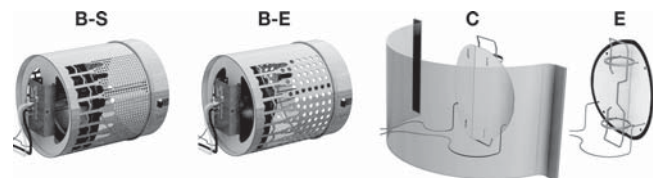

LCP/LKP/LCC + MBBV (Pascal)

Go to www.LindQST.com to find details about the MBBV plenum box and the pascal solutions.

Plain diffuser

LCC/LKP/LCP

Technical data

Following LCC/LCP/LKP+plenum box data are valid for MBB-S/-E.

For MBC, MBE and MBBV data, go to www.lindQST.com

For full configuration of your LCC/LCP/LKP diffuser, go to the LindQST Airborne configurator.

Capacity

Air flow q_v [l/s] and [m³/h], total pressure Δp_t [Pa], throw $l_{0.2}$ [m] and sound power level L_{WA} [dB(A)] can be seen in the diagrams.

Frequency-related sound power level


The sound power level in the frequency band is defined as $L_{WA} + K_{ok}$. K_{ok} values are specified in charts beneath the diagrams on the following pages.

Quick selection, supply air

LCC/LKP/LCP+MBB-S		$\Delta p_t \geq 50$ Pa 30 dB(A)		$\Delta p_t \geq 50$ Pa 35 dB(A)	
$\varnothing d_1$	$\varnothing d_2$	l/s	m ³ /h	l/s	m ³ /h
100	125	37	133	44	158
100	160	39	140	48	173
125	125	48	173	56	202
125	160	56	202	66	238
125	200	61	220	73	263
160	160	67	241	85	306
160	200	79	284	99	356
160	250	95	342	113	407
200	200	92	331	117	421
200	250	105	378	122	439
200	315	118	425	145	522
250	250	112	403	132	475
250	315	131	472	168	605
315	315	144	518	169	608

Throw $l_{0.2}$

Throw $l_{0.2}$ [m] can be seen in the diagram for isothermal air, at a terminal velocity of 0.2 m/s.

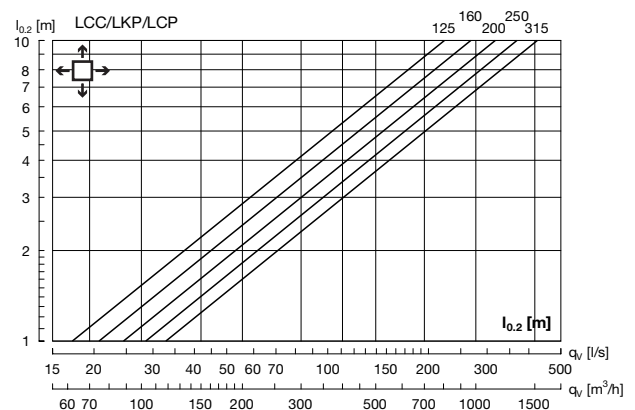

Sound attenuation

Sound attenuation of the diffusers ΔL from duct to room, including end reflection, see table below.

LCC/LCP/LKP + MBB-S/-E		Centre frequency Hz							
$\varnothing d_1$	$\varnothing d_2$	63	125	250	500	1K	2K	4K	8K
100	125	17	15	10	17	15	18	19	21
100	160	17	16	6	10	18	18	18	21
125	125	17	15	10	17	15	18	19	21
125	160	15	14	10	17	16	17	18	21
125	200	13	12	7	13	13	16	17	18
160	160	17	15	12	21	19	19	21	21
160	200	17	16	10	20	17	17	19	20
160	250	16	14	7	17	15	16	19	20
200	200	13	11	10	17	18	15	19	18
200	250	14	11	8	15	19	15	18	17
200	315	14	9	7	13	18	14	17	17
250	250	15	10	9	17	18	18	19	19
250	315	15	8	9	16	18	16	18	18
315	315	8	10	10	17	18	17	18	24

Balancing

Balancing guide, see the MB installation instruction.

LCP/LKP/LCC + MBBV (Pascal)


Go to www.LindQST.com to find details about the MBBV plenum box and the pascal solutions.

Plain diffuser


LCC/LKP/LCP

Technical data


LCC/LKP/LCP without box – supply air

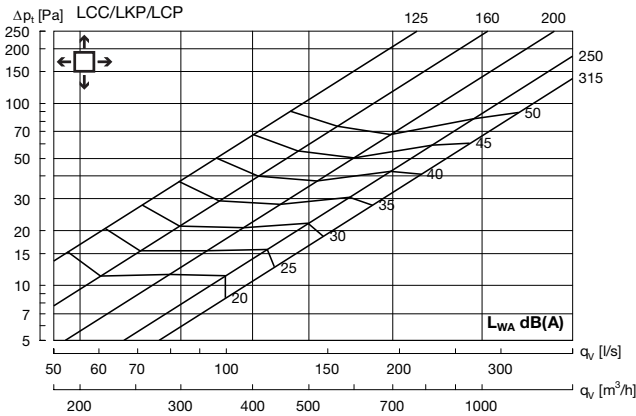

LCC/LKP/LCP 125 + MBB-S - Supply air

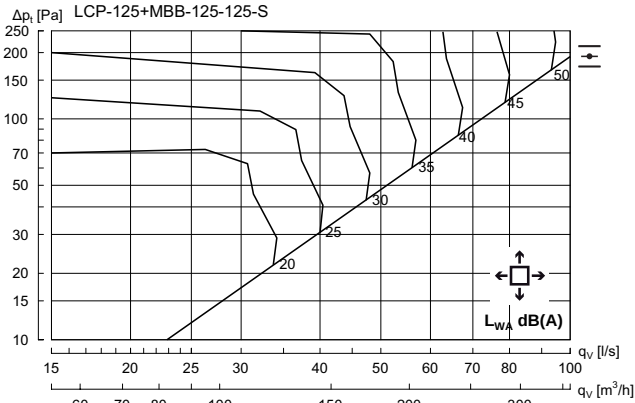

Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	13	7	1	-2	-6	-14	-20	-25

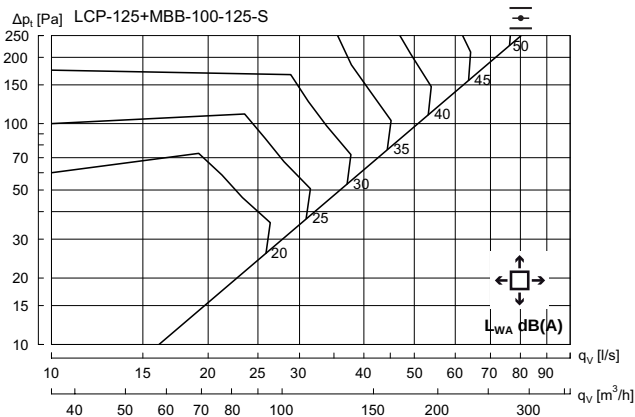


Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	10	4	2	-2	-6	-10	-17	-23

Plain diffuser


LCC/LKP/LCP

Technical data


LCC/LKP/LCP 160 + MBB-S - Supply air

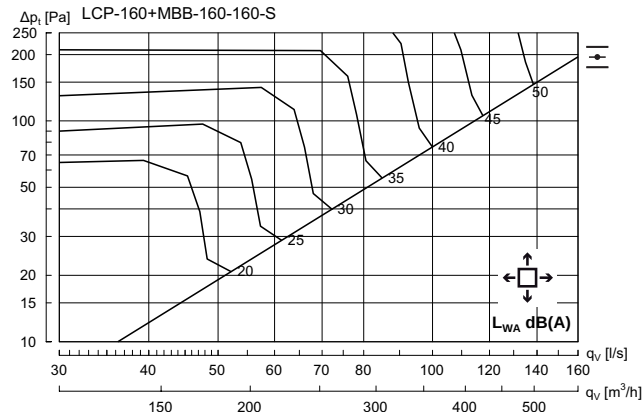

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	8	0	-3	-6	-10	-19	-25

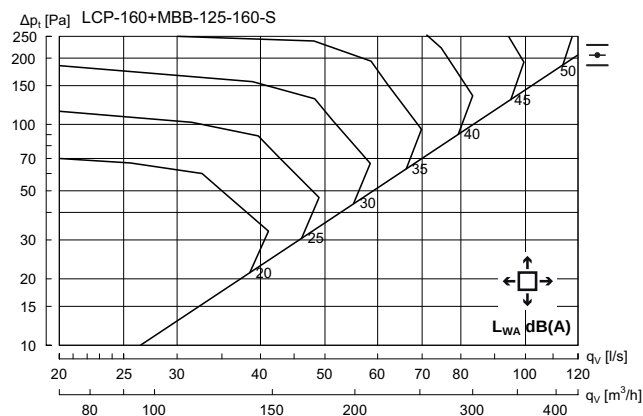


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	9	8	1	-3	-6	-11	-16	-22

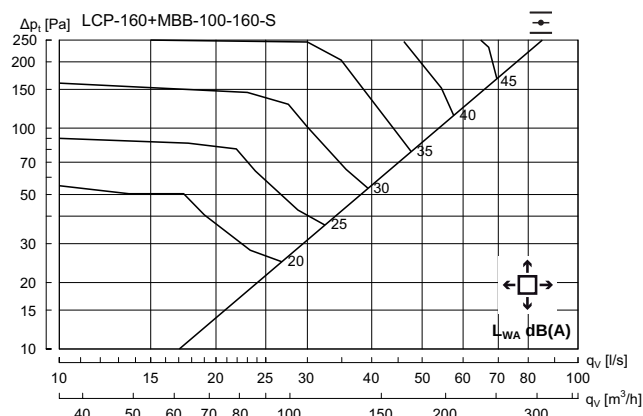


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	9	5	0	-1	-7	-10	-16	-21


LCC/LKP/LCP 200 + MBB-S - Supply air

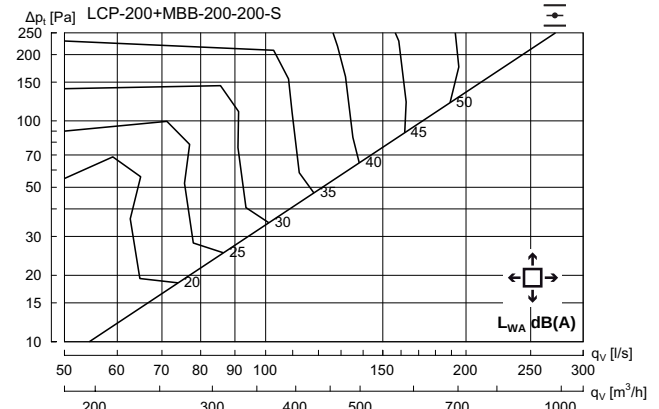

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	8	0	-3	-5	-14	-21	-24

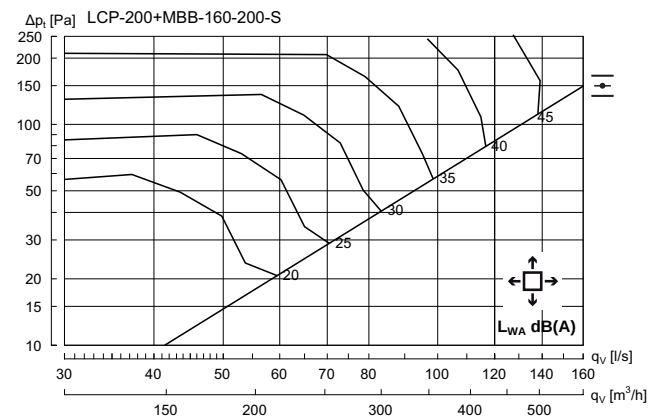

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	7	-1	-3	-5	-10	-15	-21

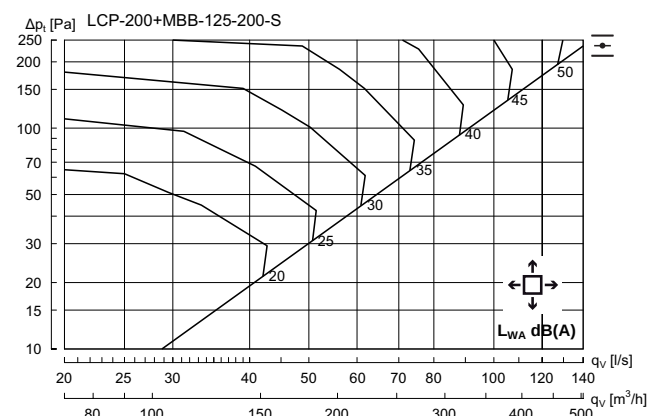


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	6	6	0	-3	-5	-9	-16	-21


Plain diffuser

Technical data


LCC/LKP/LCP 250 + MBB-S - Supply air

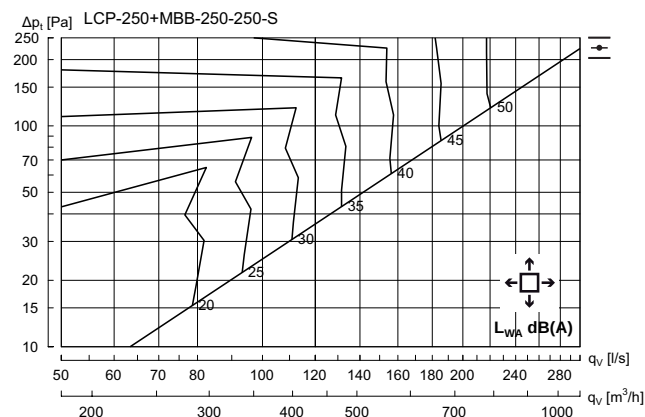

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	15	6	-1	-1	-5	-15	-23	-29

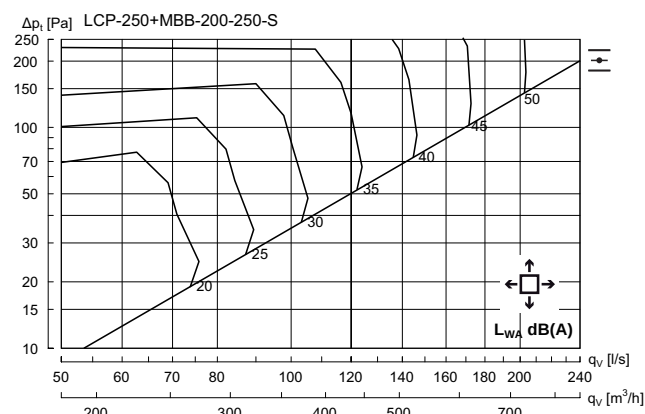


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	8	-1	-2	-5	-13	-20	-26

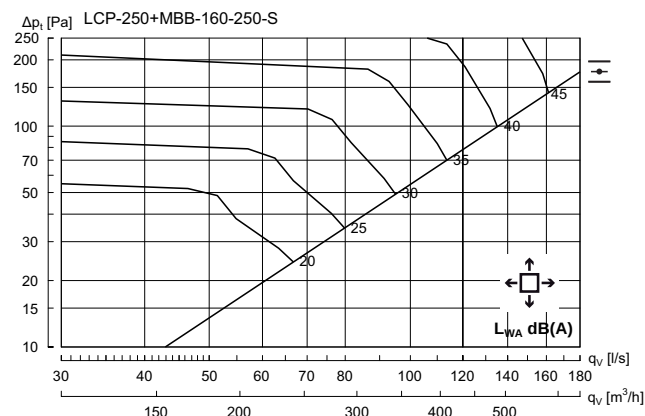


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	7	0	-4	-5	-11	-16	-22


LCC/LKP/LCP 315 + MBB-S - Supply air

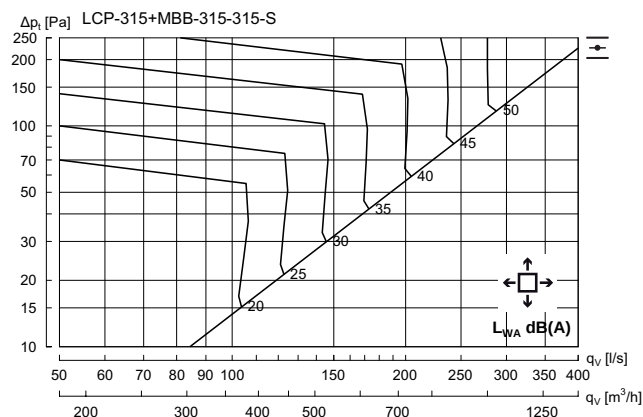

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	4	0	-2	-4	-14	-19	-27

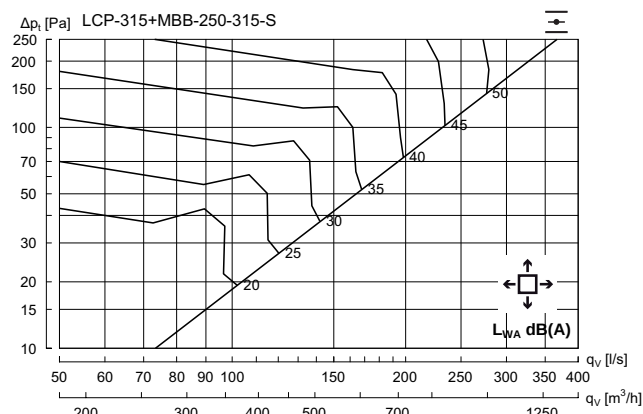

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	7	0	-2	-6	-10	-17	-23

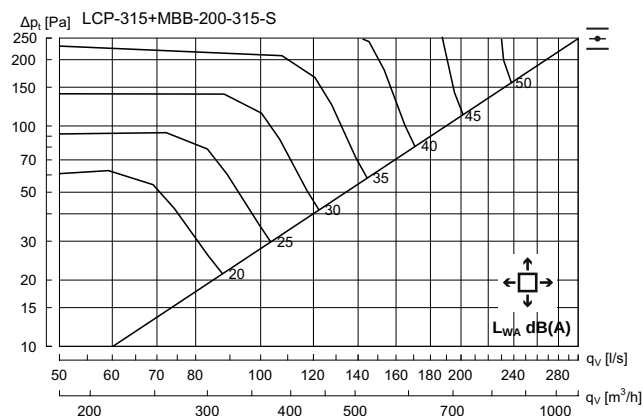


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	10	0	-3	-6	-12	-19	-24

Plain diffuser


LCC/LKP/LCP

Technical data


LCC/LKP/LCP without box – Extract

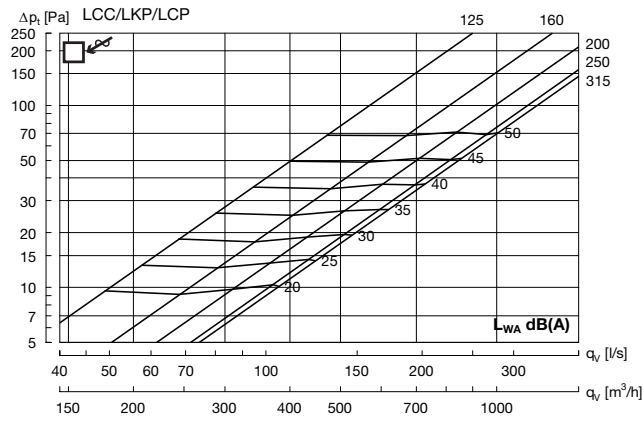

LCC/LKP/LCP 125 + MBB-E - Extract air

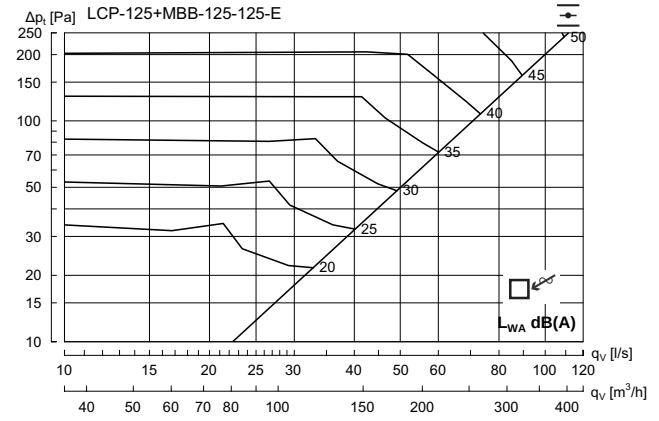

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	4	-1	-1	-6	-12	-16	-22

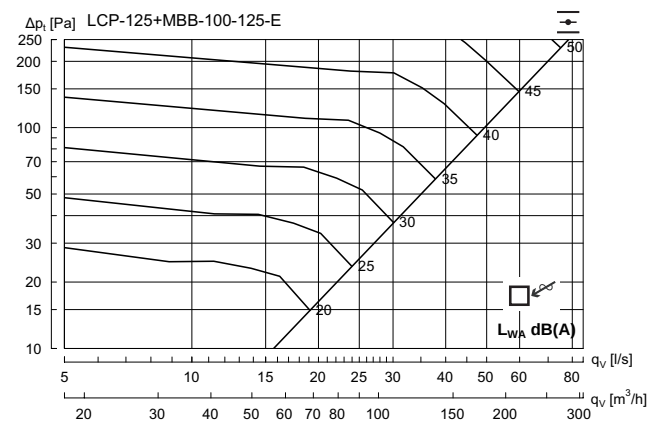


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	13	-1	3	-1	-9	-11	-17	-23


Plain diffuser

Technical data


LCC/LKP/LCP 160 + MBB-E - Extract air

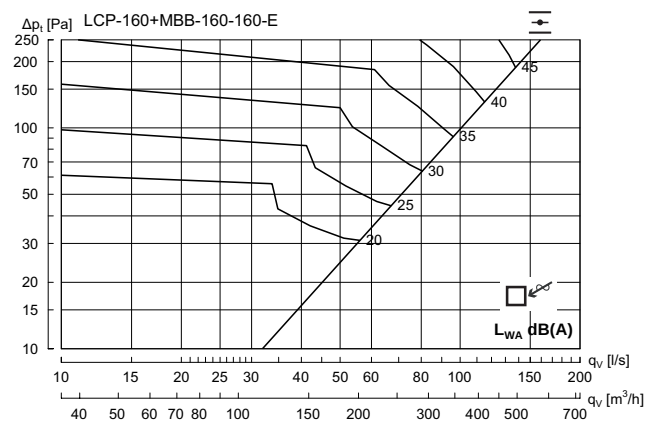

Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	16	4	-1	-2	-5	-10	-16	-21

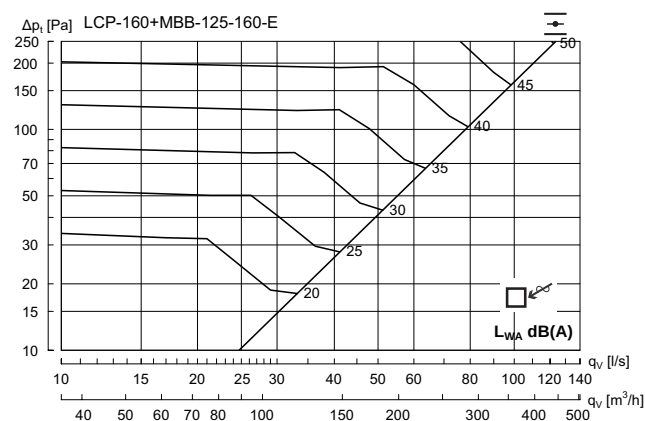


Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	14	5	0	-1	-6	-11	-15	-21

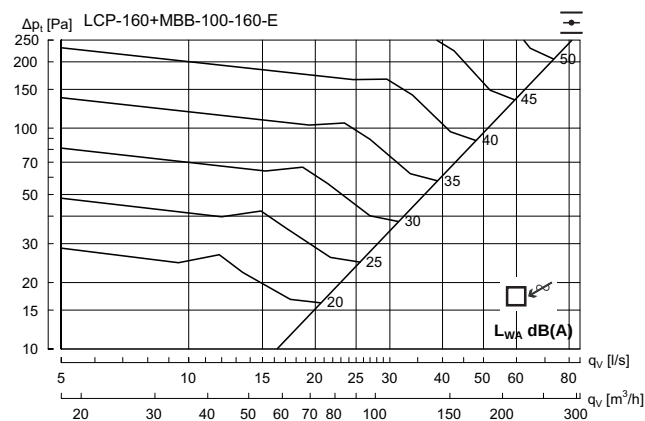


Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	11	3	2	0	-8	-13	-17	-23


LCC/LKP/LCP 200 + MBB-E - Extract air

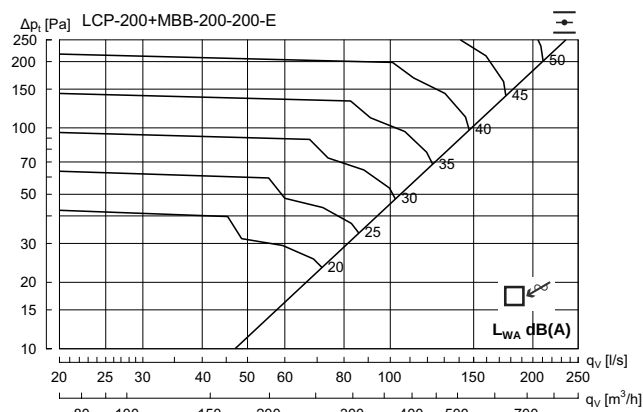

Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	15	5	0	-2	-6	-10	-15	-23

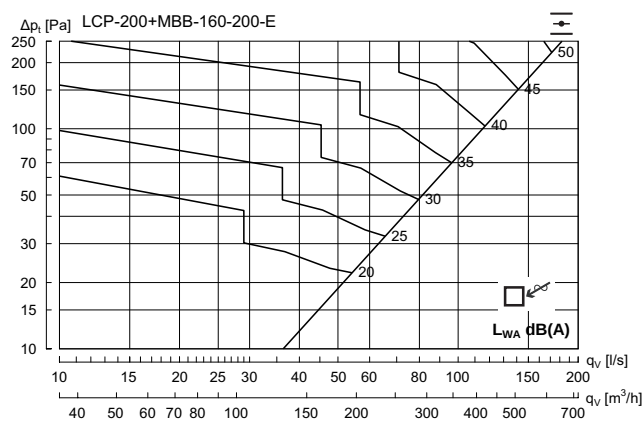

Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	16	5	-1	-3	-5	-10	-15	-21

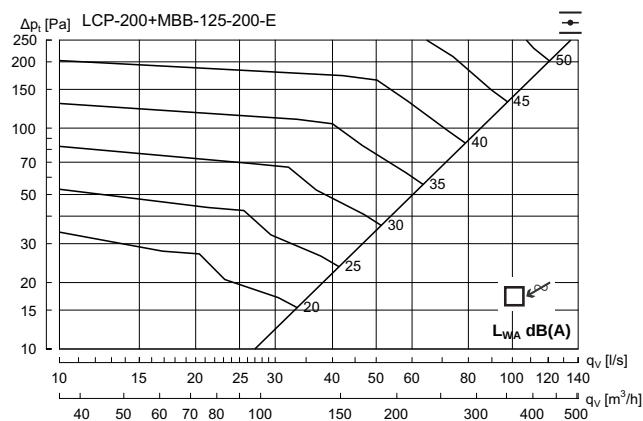


Hz	63	125	250	500	1K	2K	4K	8K
K _{ok}	11	3	-1	-2	-5	-10	-16	-22


Plain diffuser

Technical data


LCC/LKP/LCP 250 + MBB-E - Extract air

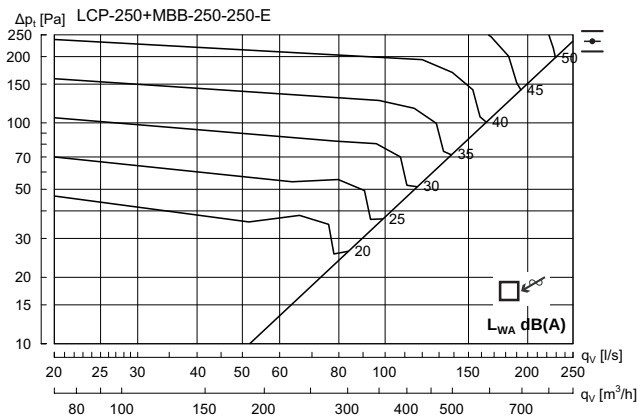

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	11	4	1	-2	-5	-11	-17	-25

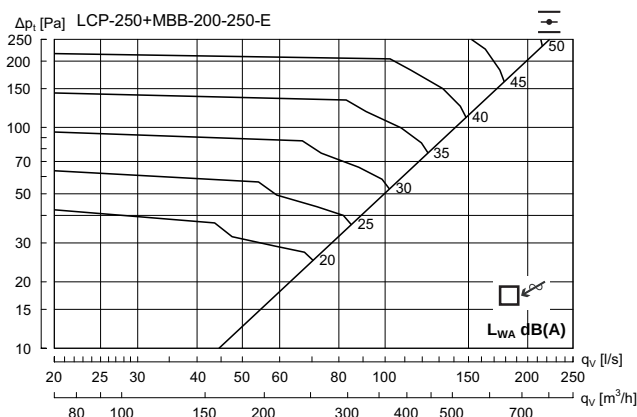


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	14	4	0	-2	-6	-11	-16	-25

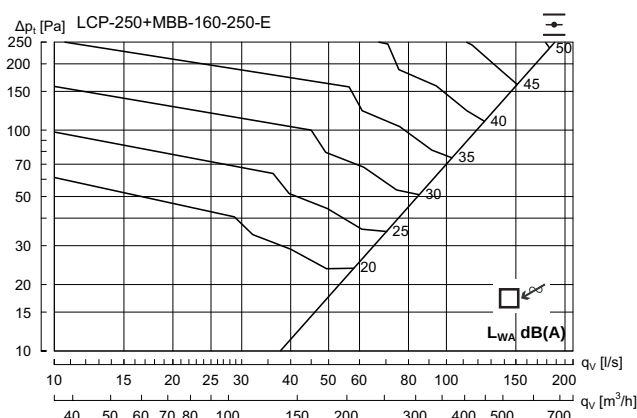


Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	19	6	-1	-4	-5	-12	-18	-26


LCC/LKP/LCP 315 + MBB-E - Extract air

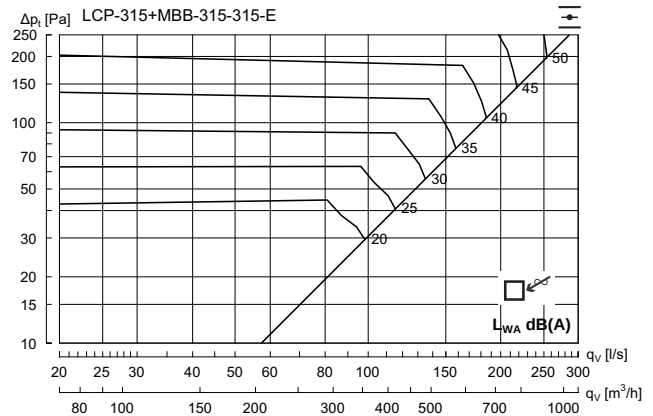

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	4	2	-3	-6	-9	-18	-27

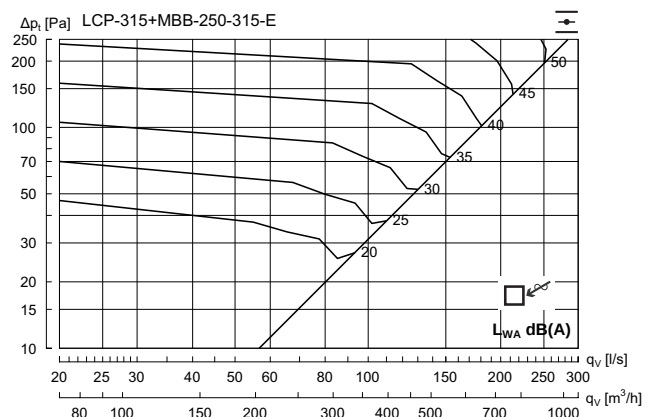

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	12	5	2	-3	-6	-10	-17	-24

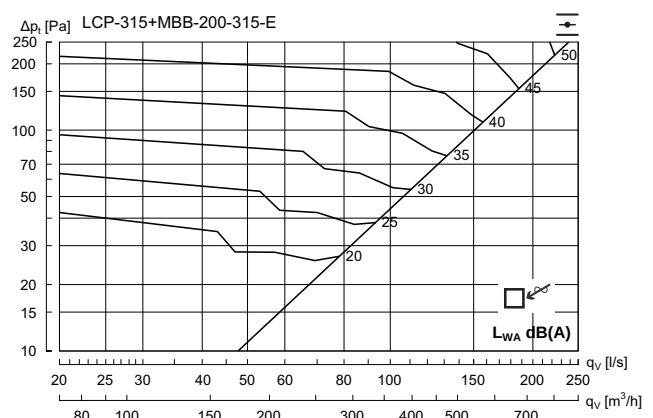

Hz	63	125	250	500	1K	2K	4K	8K
K_{ok}	14	5	0	-3	-5	-10	-16	-25